





## 2系列轻型——活动式/固定式

- 每个轮最大承载95公斤

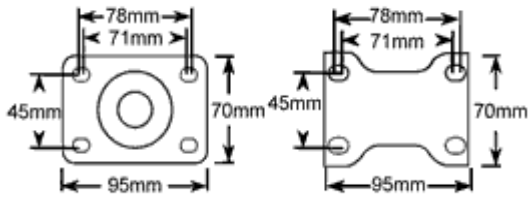

活动底板

固定底板



Swivel Cross Section



2-3689-54



2-3688-54

| 轮径<br>(mm) | 轮宽<br>(mm) | 承载<br>(kg) | 单轮    | 轴承 | 型号        |           | 重量(kg) | 安装高度<br>(mm) | 转动半径<br>(mm) |
|------------|------------|------------|-------|----|-----------|-----------|--------|--------------|--------------|
|            |            |            |       |    | 活动        | 固定        |        |              |              |
| 65         | 28         | 80         | 聚烯烃   | 轴套 | 2-2689-52 | 2-2688-52 | 0.9    | 84           | 60           |
|            |            | 80         | 橡胶(硬) | 轴套 | 2-2689-54 | 2-2688-54 |        |              |              |
|            |            | 55         | 橡胶(软) | 轴套 | 2-2689-44 | 2-2688-44 |        |              |              |
| 75         | 32         | 95         | 聚烯烃   | 轴套 | 2-3689-52 | 2-3688-52 | 0.7    | 97           | 68           |
|            |            | 95         | 橡胶(硬) | 轴套 | 2-3689-54 | 2-3688-54 |        |              |              |
|            |            | 55         | 橡胶(软) | 轴套 | 2-3689-44 | 2-3688-44 |        |              |              |

备注：仅3689(3"活动型)可配边刹掣BRK3，但刹掣轮不能配防缠盖